


Switching Diode

Features

- Silicon Epitaxial Planar Diodes

Applications

General purposes

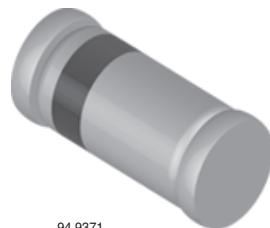

94 9371

Mechanical Data

Case: MiniMELF Glass Case (SOD-80)

Weight: approx. 30 mg

Cathode Band Color: Black

Packaging Codes/Options:

GS18 / 10 k per 13" reel (8 mm tape), 10 k/box

GS08 / 2.5 k per 7" reel (8 mm tape), 12.5 k/box

Parts Table

| Part | Type differentiation | Ordering code | Remarks |
|--------|---------------------------|----------------------------|---------------|
| BAV100 | $V_{RRM} = 60 \text{ V}$ | BAV100-GS18 or BAV100-GS08 | Tape and Reel |
| BAV101 | $V_{RRM} = 120 \text{ V}$ | BAV101-GS18 or BAV101-GS08 | Tape and Reel |
| BAV102 | $V_{RRM} = 200 \text{ V}$ | BAV102-GS18 or BAV102-GS08 | Tape and Reel |
| BAV103 | $V_{RRM} = 250 \text{ V}$ | BAV103-GS18 or BAV103-GS08 | Tape and Reel |

Absolute Maximum Ratings

$T_{amb} = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Test condition | Part | Symbol | Value | Unit |
|---------------------------------|---------------------|--------|-----------|-------|------|
| Repetitive peak reverse voltage | | BAV100 | V_{RRM} | 60 | V |
| | | BAV101 | V_{RRM} | 120 | V |
| | | BAV102 | V_{RRM} | 200 | V |
| | | BAV103 | V_{RRM} | 250 | V |
| Reverse voltage | | BAV100 | V_R | 50 | V |
| | | BAV101 | V_R | 100 | V |
| | | BAV102 | V_R | 150 | V |
| | | BAV103 | V_R | 200 | V |
| Peak forward surge current | $t_p = 1 \text{ s}$ | | I_{FSM} | 1 | A |
| Repetitive peak forward current | | | I_{FRM} | 625 | mA |
| Forward current | | | I_F | 250 | mA |
| Power dissipation | | | P_V | 500 | mW |

Thermal Characteristics

$T_{amb} = 25 \text{ }^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test condition | Symbol | Value | Unit |
|---------------------------|---------------------------------------|------------|---------------|--------------------|
| Junction lead | | R_{thJL} | 350 | K/W |
| Junction ambient | on PC board 50 mm x 50 mm x 1.6 mm | R_{thJA} | 500 | K/W |
| Junction temperature | | T_j | 175 | $^{\circ}\text{C}$ |
| Storage temperature range | | T_{stg} | - 65 to + 175 | $^{\circ}\text{C}$ |

Electrical Characteristics

$T_{amb} = 25 \text{ }^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test condition | Part | Symbol | Min | Typ. | Max | Unit |
|---------------------------------|--|--------|------------|-----|------|-----|---------------|
| Forward voltage | $I_F = 100 \text{ mA}$ | | V_F | | | 1 | V |
| Reverse current | $V_R = 50 \text{ V}$ | BAV100 | I_R | | | 100 | nA |
| | $V_R = 100 \text{ V}$ | BAV101 | I_R | | | 100 | nA |
| | $V_R = 150 \text{ V}$ | BAV102 | I_R | | | 100 | nA |
| | $V_R = 200 \text{ V}$ | BAV103 | I_R | | | 100 | nA |
| | $T_j = 100 \text{ }^{\circ}\text{C}, V_R = 50 \text{ V}$ | BAV100 | I_R | | | 15 | μA |
| | $T_j = 100 \text{ }^{\circ}\text{C}, V_R = 100 \text{ V}$ | BAV101 | I_R | | | 15 | μA |
| | $T_j = 100 \text{ }^{\circ}\text{C}, V_R = 150 \text{ V}$ | BAV102 | I_R | | | 15 | μA |
| | $T_j = 100 \text{ }^{\circ}\text{C}, V_R = 200 \text{ V}$ | BAV103 | I_R | | | 15 | μA |
| Breakdown voltage | $I_R = 100 \mu\text{A}, t_p/T = 0.01,$ $t_p = 0.3 \text{ ms}$ | BAV100 | $V_{(BR)}$ | 60 | | | V |
| | $I_R = 100 \mu\text{A}, t_p/T = 0.01,$ $t_p = 0.3 \text{ ms}$ | BAV101 | $V_{(BR)}$ | 120 | | | V |
| | $I_R = 100 \mu\text{A}, t_p/T = 0.01,$ $t_p = 0.3 \text{ ms}$ | BAV102 | $V_{(BR)}$ | 200 | | | V |
| | | BAV103 | $V_{(BR)}$ | 250 | | | V |
| Diode capacitance | $V_R = 0, f = 1 \text{ MHz}$ | | C_D | | 1.5 | | pF |
| Differential forward resistance | $I_F = 10 \text{ mA}$ | | r_f | | 5 | | Ω |
| Reverse recovery time | $I_F = I_R = 30 \text{ mA}, i_R = 3 \text{ mA},$ $R_L = 100 \Omega$ | | t_{rr} | | | 50 | ns |

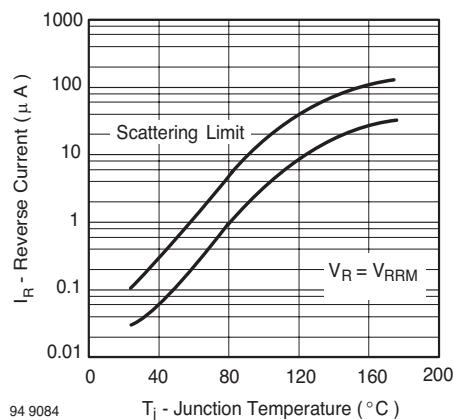
Typical Characteristics ($T_{amb} = 25^\circ C$ unless otherwise specified)


Fig. 1 Reverse Current vs. Junction Temperature

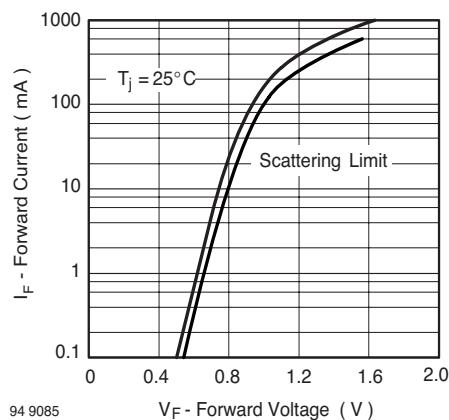


Fig. 2 Forward Current vs. Forward Voltage



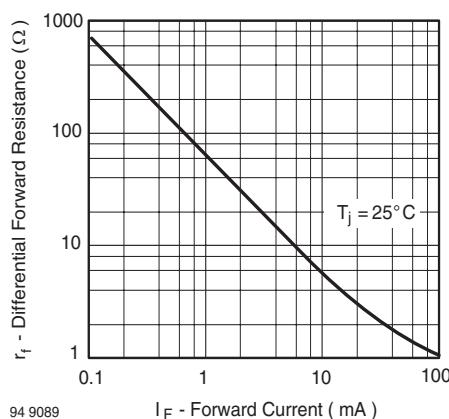



Fig. 3 Differential Forward Resistance vs. Forward Current

Package Dimensions in mm (Inches)


Cathode indication

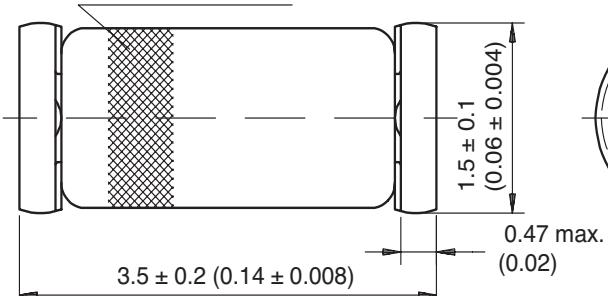

Mounting Pad Layout

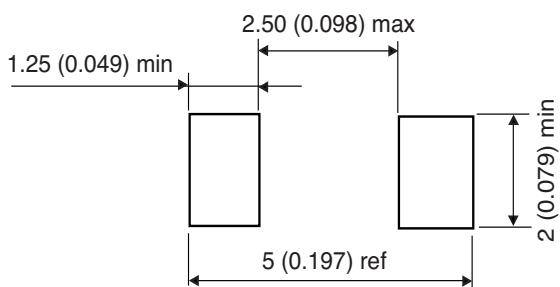

Glass case
Mini Melf / SOD 80
JEDEC DO 213 AA



96 12070

Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423